
Product Change Notification(PCN)

Issue Date: 08.07.2013
Modification / Revision Date: 08.07.2013

USB, Style B, DIP (2010 catalogue page 119)

Change Notification # : PCN 20130807-A-USBSB

Description of changes: CHANGE OF MANUFACTURING LOCATION
CHANGE TO NEW TOOLS
1. Amendment of the specification
2. Tolerance : New : x.xx ±0.20 // x.x ±0.30
3. Change of dimensions, see sheet 3
4. Catalogue 2010 shows different specification
5. Draw.-No. ASS 1122B C0rev04 substitutes ASS 1122B C0rev03

Date of change and Implementation: Change: KW 45/13 [Datecode of Production]
Implementation: KW 45/13

Key Characteristics of Change: Dimensions and Tolerances

Products Affected: A-USBSB

Reason for Change: Change of manufacturing location
Change to new tools
Starts in Week45 (01.11.2013)

Response : No response to this notification is required.

Product Change Notification(PCN)

Issue date: 08.07.2013

Modification / Revision date: 08.07.2013

Reference Documents / Attachments:

Document: Drawing

ASSMANN WSW P/N	Drawing Number
A-USBSB	ASS 1122B C0rev04

As attached

PCN Revision History:

Date of Revision: 08.07.2013

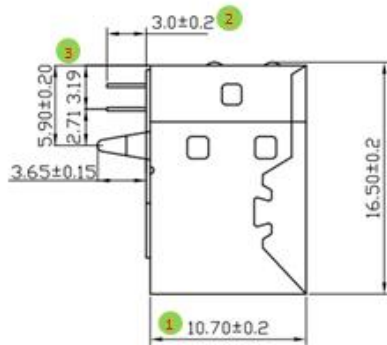
Revision Number: 00

Product Change Notification(PCN)

Issue date: 08.07.2013
Modification / Revision date: 08.07.2013


A-USBSB

Old version



- (1) 10.70±0.20mm
- (2) 3.0±0.20mm
- (3) 3.19mm

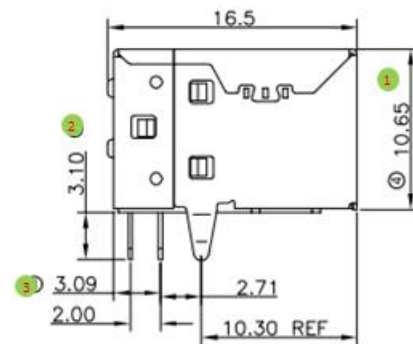New version






- (1) 10.65mm
- (2) 3.10mm
- (3) 3.09mm

PCN Revision History:

Date of Revision: 08.07.2013

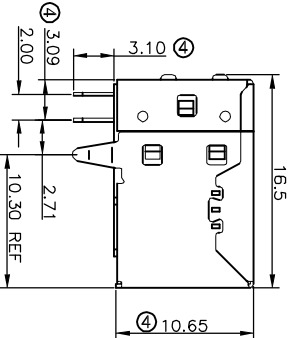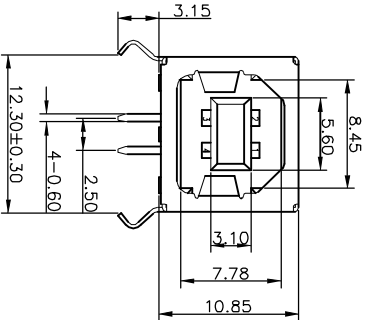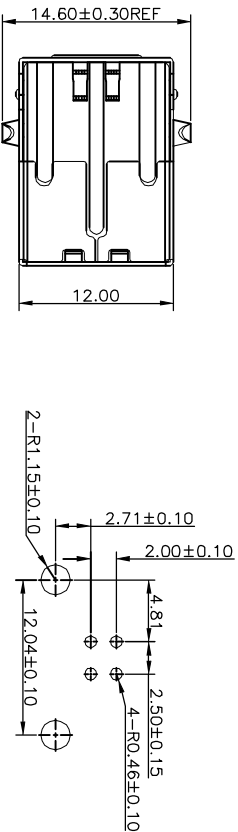Revision Number: 00

	1	2	3	4	5	6	7																																																																	
A	 							A																																																																
B	<p>NOTES:</p> <p>1. Material:</p> <p>1.1 Housing: PBT+30%GF UL94V-0, Color White</p> <p>1.2 Shell: Copper Alloy+</p> <p>1.3 Contact :Brass</p> <p>2. FINISH:</p> <p>2.1 Contact Area: Selective Gold Flash</p> <p>Solder Area: Tin Plated</p> <p>Under: Ni Plated</p> <p>3. MECHANICAL:</p> <p>3.1 Mating Force:3.57kgf Max.</p> <p>3.2 Unmating Force:1.02kgf Min</p> <p>3.3 Durability:1500 cycles Min</p> <p>4. ELECTRICAL:</p> <p>4.1 Current Rating:1.5A</p> <p>4.2 Dielectric Strength:500V AC FOR 1 MINUTE</p> <p>4.3 Contact Resistance:30mΩ Max</p> <p>4.4 Insulation Resistance:1000 MΩ Min</p> <p>5. Operating temperature: -55°C TO +85°C</p> <p>6. PACKING: Tray</p>							B																																																																
C	 <p>RECOMMENDED P.C.B LAYOUT</p>							C																																																																
D								D																																																																
E								E																																																																
F								F																																																																
G	<p style="text-align: center;">RoHS compliant</p> <table border="1"> <thead> <tr> <th>Scale</th> <th>Free</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>TOLERANCE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.X</td> <td>±0.3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>X.XX</td> <td>±0.20</td> <td>④</td> <td>Update</td> <td>08.06.2013</td> <td>Winnie</td> <td>Approved</td> <td>08.06.2013</td> </tr> <tr> <td>X.XXX</td> <td>±0.100</td> <td>③</td> <td>Update</td> <td>07.07.2009</td> <td>Sterfanle</td> <td></td> <td></td> </tr> <tr> <td>DIM</td> <td>TOL</td> <td>②</td> <td>To adapt</td> <td>11.09.2007</td> <td>N.Schulz</td> <td></td> <td></td> </tr> <tr> <td>ANG.</td> <td>±1°</td> <td>①</td> <td>Production plant change</td> <td>04.05.2007</td> <td>Hellwig</td> <td></td> <td></td> </tr> <tr> <td>Angle</td> <td>TOL</td> <td>Id.</td> <td>Modification</td> <td>Date</td> <td>Name</td> <td></td> <td></td> </tr> </tbody> </table>							Scale	Free							TOLERANCE								X.X	±0.3							X.XX	±0.20	④	Update	08.06.2013	Winnie	Approved	08.06.2013	X.XXX	±0.100	③	Update	07.07.2009	Sterfanle			DIM	TOL	②	To adapt	11.09.2007	N.Schulz			ANG.	±1°	①	Production plant change	04.05.2007	Hellwig			Angle	TOL	Id.	Modification	Date	Name			G
Scale	Free																																																																							
TOLERANCE																																																																								
X.X	±0.3																																																																							
X.XX	±0.20	④	Update	08.06.2013	Winnie	Approved	08.06.2013																																																																	
X.XXX	±0.100	③	Update	07.07.2009	Sterfanle																																																																			
DIM	TOL	②	To adapt	11.09.2007	N.Schulz																																																																			
ANG.	±1°	①	Production plant change	04.05.2007	Hellwig																																																																			
Angle	TOL	Id.	Modification	Date	Name																																																																			
H	<table border="1"> <thead> <tr> <th>Date</th> <th>Name</th> <th>Customer-No.</th> <th>Drawing-No.</th> <th>Replace</th> </tr> </thead> <tbody> <tr> <td>04.05.2007</td> <td>Hellwig</td> <td></td> <td></td> <td></td> </tr> <tr> <td>08.06.2013</td> <td>Winnie</td> <td>ASSMANN WSV-No.</td> <td>A-USBSB</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>ASS 1122B CO</td> <td>rev04</td> </tr> </tbody> </table> <p style="text-align: center;">ASSMANN WSV/ components</p>							Date	Name	Customer-No.	Drawing-No.	Replace	04.05.2007	Hellwig				08.06.2013	Winnie	ASSMANN WSV-No.	A-USBSB					ASS 1122B CO	rev04	H																																												
Date	Name	Customer-No.	Drawing-No.	Replace																																																																				
04.05.2007	Hellwig																																																																							
08.06.2013	Winnie	ASSMANN WSV-No.	A-USBSB																																																																					
			ASS 1122B CO	rev04																																																																				
	1	2	3	4	5	6	7	131																																																																